
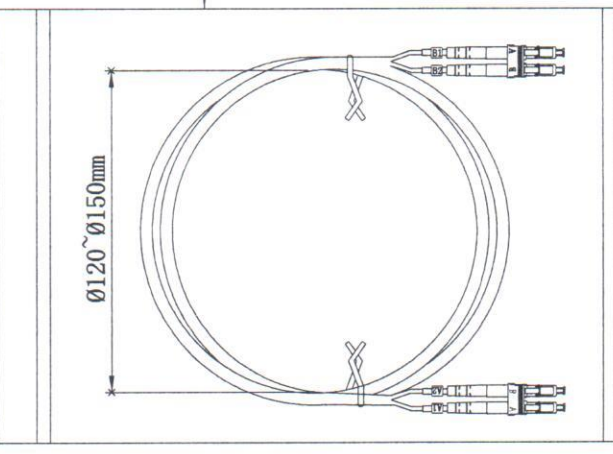


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description

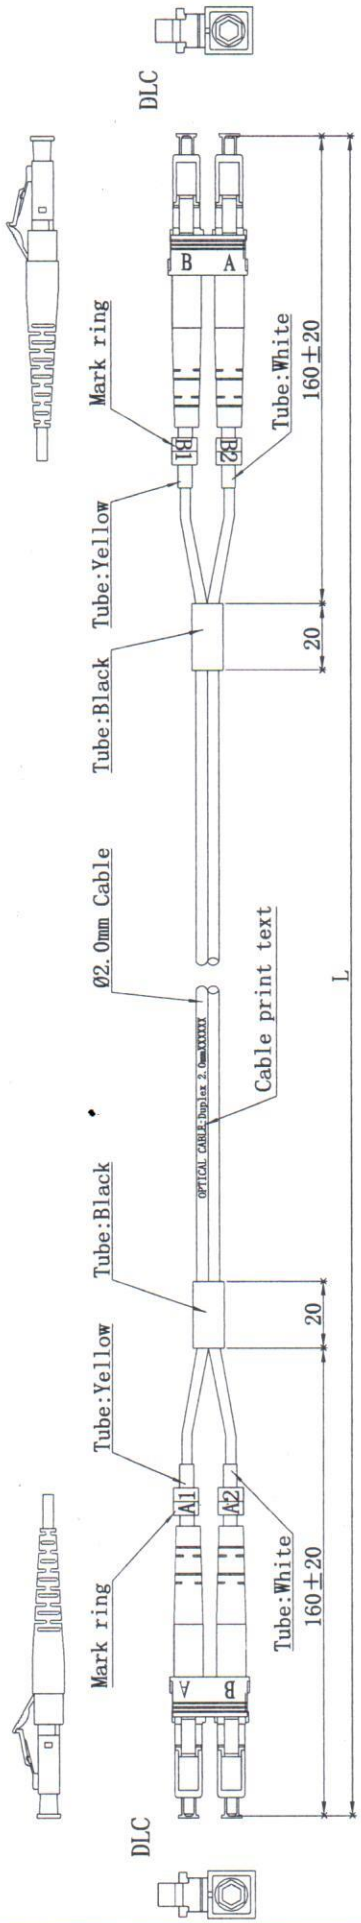


Specifications:

Type	DLC/UPC-DLC/UPC
Fiber Mode	OM1
Core Diameter (um)	62.5/125
Operating Wavelength (nm)	850/1300
Cable Color	Orange
Cable Diameter (mm)	Ø2.0
Operating Temperature (° C)	-40 ~ +75
Storage Temperature (° C)	-40 ~ +85
Insertion loss (dB)	≤ 0.2dB
Return loss (dB)	≥ 35dB

$L \leq 5m$ , TOLERANCES:  $0 \leq \Delta L \leq 5cm$   
 $L > 5m$ , TOLERANCES:  $0 \leq \Delta L \leq 1\% * L$

Remarks:

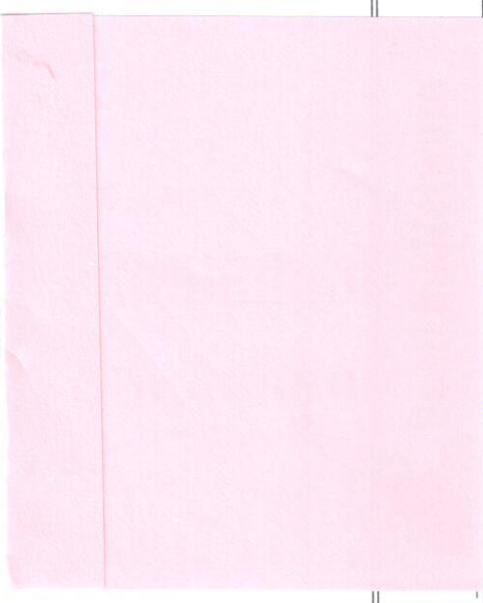

NO.	PART NAME	QTY	UNIT	DESCRIPTION
①				
②				
③				

DRAWN BY	DATE: 2015/05/14	DESCRIPTION: LC-LC-DX OM1 Patchcord
CHECKED BY	SHEET 1of1	ITEM NO.
APPROVED BY	SCALE 1:1	REV. 00 UNIT:mm

Unless specified on the drawing, tolerances are per the follows:

.x	+1
.xx	+0.2
.xxx	+0.05